



PRINCE 400  
PRINCE 600



LINEAR 400



COUPER 24

Teknik Özellikler Technical Data	Motor (Vdc) Motor	Motor Gücü (W) Motor Power	Hız (cm/sec) Speed	Max.Kapı Genişliği (M) Max. Width of Gate	Max. Kapı Ağırlığı (kg) Max. Weight Of Gate
<b>r-tec</b> COUPER 24	24	80	1,3 - 1,6	2	125
<b>r-tec</b> LINEAR 400	24	50	1,3 - 1,6	3	300
<b>r-tec</b> PRINCE 400	24	120	1,6 - 2,0	3	200
<b>r-tec</b> PRINCE 600	24	120	1,6 - 2,0	4	400

KONTROL ÜNİTELERİ / CONTROL UNITS



G24 KONTROL ÜNİTESİ (24V)  
G24 CONTROL UNIT (24V)



G220 KONTROL ÜNİTESİ (220V)  
G220 CONTROL UNIT (220V)

AKSESUARLAR / ACCESSORIES



RF433 HARİCİ ALICI (230-24V)  
RF433 EXTERNAL RECEIVERS (230-24V)



ZAR4 KUMANDA (4KANAL)  
ZAR4 REMOTE CONTROLS (4 Chn.)



MF FOTOSEL  
MF PHOTOCCELL



BT180 PİLLİ FOTOSEL  
BT180 PHOTOCCELL WITH BATTERY



A-FLA LED FLAŞÖR (230-24V)  
A-FLA LED FLASHING LIGHT (230-24V)



HARİCİ ANTEN  
EXTERNAL ANTENNA



LOOP DEDEKTÖR 1 KANAL  
LOOP DETECTOR 1 Chn.



AKÜ KİT  
BATTERY KIT



ELEKTRİKLİ KİLİT YATAY (12V)  
HORIZONTAL ELECTRIC LOCK (12V)




ELEKTRİKLİ KİLİT DÜŞEY (12V)  
VERTICAL ELECTRIC LOCK (12V)



Geleceğe Açılan Kapılar...  
The doors that OPEN to the future...



**Dinamix & DinamixBAR**

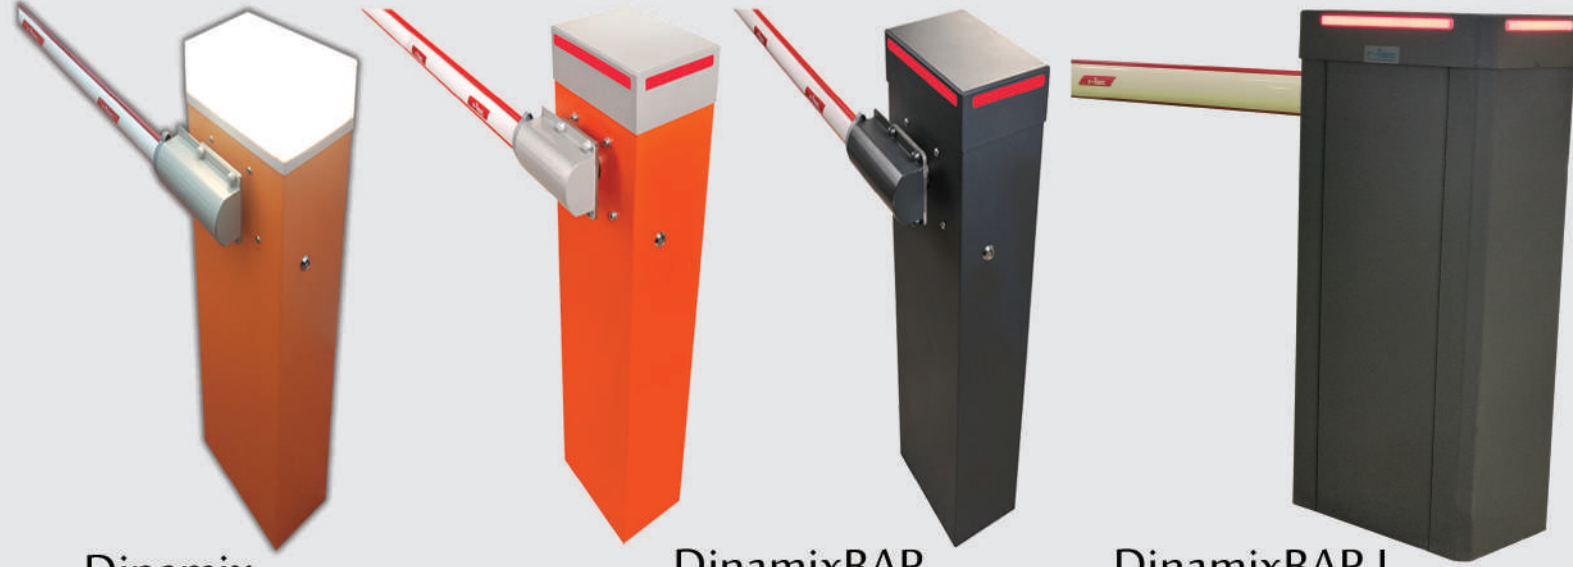

Dinamix

DinamixBAR

DinamixBAR L

Teknik Özellikler Technical Data	Enerji Girişi (Vac) Power Supply	Motor (Vdc) Motor	Motor Gücü (W) Motor Power	Açma Süresi (sec) Opening Time	Kol (m) Bar
<b>r-tec</b> Dinamix 4000 DinamixBar 4000	230	24	190	4	4
<b>r-tec</b> Dinamix 5000 DinamixBar 5000	230	24	190	5	5
<b>r-tec</b> Dinamix 6000 DinamixBar 6000	230	24	190	6 - 8	6
<b>r-tec</b> Dinamix 7000 DinamixBar 7000	230	24	190	6 - 8	7
<b>r-tec</b> DinamixBar L9000	230	24	190	6 - 9	9

**KONTROL ÜNİTELERİ / CONTROL UNITS**



**AKSESUARLAR / ACCESSORIES**

- RF433 HARİCİ ALICI (230-24V)  
RF433 EXTERNAL RECEIVERS (230-24V)
- ZARA KUMANDA (4 KANAL)  
ZARA REMOTE CONTROLS (4 Chn.)
- MF FOTOSEL  
MF PHOTOCELL
- BT180 PİLLİ FOTOSEL  
BT180 PHOTOCELL WITH BATTERY
- A-FLA LED FLAŞÖR (230-24V)  
A-FLA LED FLASHING LIGHT (230-24V)
- AKÜ KİT  
BATTERY KİT
- LED KİT  
LED KİT
- BASTON AYAK  
MOBILE STAND FOR BARS
- KOL KIRILMA APARATI  
JOINT FOR BARS
- SAÇAK (2M)  
CURTAIN (2M)




**KING Serisi**



Teknik Özellikler Technical Data	Enerji Girişi (Vac) Power Supply	Motor (Vdc/Vac) Motor	Motor Gücü (Nm) Stall Torque	Max. Hız (cm/sec) Max. Speed	Max. Kapı Ağırlığı (kg) Max. Weight Of Gate
<b>r-tec</b> KING524F	230	24	2.95	53	500
<b>r-tec</b> KING1224F	230	24	4.15	44	1200
<b>r-tec</b> KING500	230	230	200	21	500
<b>r-tec</b> KING1000	230	230	400	21	1000
<b>r-tec</b> KING2000	230	230	400	21	2000
<b>r-tec</b> KING2500I	230	380	750	67	2000
<b>r-tec</b> KING4000	380	380	2200	21	4000

**KONTROL ÜNİTELERİ / CONTROL UNITS**

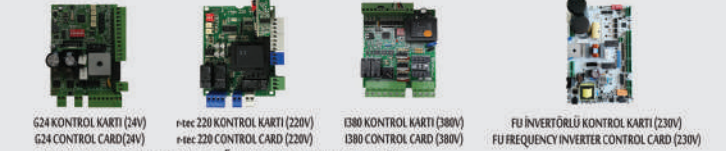

**AKSESUARLAR / ACCESSORIES**

- RF433 HARİCİ ALICI (230-24V)  
RF433 EXTERNAL RECEIVERS (230-24V)
- ZARA KUMANDA (4 KANAL)  
ZARA REMOTE CONTROLS (4 Chn.)
- MF FOTOSEL  
MF PHOTOCELL
- BT180 PİLLİ FOTOSEL  
BT180 PHOTOCELL WITH BATTERY
- A-FLA LED FLAŞÖR (230-24V)  
A-FLA LED FLASHING LIGHT (230-24V)
- AKÜ KİT  
BATTERY KİT
- HARİCİ ANTEN  
EXTERNAL ANTENNA
- LOOP DEDEKTÖR 1 KANAL  
LOOP DEDECTOR 1 Chn.
- PLASTİK KRAMEYER DİŞLİ (ROA6)  
PLASTIC RACK (ROA6)
- ÇELİK KRAMEYER DİŞLİ (ROA4)  
STEEL RACK (ROA4)
- ÇELİK KRAMEYER DİŞLİ (ROA 10-12)  
STEEL RACK (ROA 10-12)

